

LOW VF SCHOTTKY RECTIFIER



TO-220AC/




TO-220FAC/F



TO-263/D



TO-252/S



FEATURES

- Low forward voltage
- High current capability
- High forward surge capability
- Low power losses, High efficiency
- Guarding for over voltage protection



RoHS
COMPLIANT

APPLICATIONS

Low VF Schottky barrier rectifier are designed for high frequency, miniature switched mode power supplies such as adapters, lighting and on-board DC/DC converters

Primary Characteristic

I_o	10A
V_{RRM}	100V
I_{FSM}	280A
V_F	0.62V
T_{Jmax}	150°C

MECHANICAL DATA

- **Case:** Molded plastic
- **Polarity:** As marked
- **Mounting Position:** Any
- **Molded Plastic:** UL Flammability Classification Rating 94V-0
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Solder bath temperature 275°C maximum, 10s per JESD 22-B106

Maximum Ratings at $T_a=25^\circ C$ unless otherwise specified

Characteristics	Symbol	Value		Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100		V
Working Peak Reverse Voltage	V_{RWM}	100		V
Maximum DC Blocking Voltage	V_{DC}	100		V
Maximum Average Forward Rectified Current	I_o	10		A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	280		A
Operating Temperature Range	T_J	-50 to +150		°C
Storage Temperature Range	T_{STG}	-50 to +150		°C
Typical Thermal Resistance (Note1) TO-220AC, TO-263, TO-252 TO-220FAC	$R_{\theta JC}$	2 4		°C/W

Note1: Thermal resistance from Junction to case per leg mounted on heatsink.

Electrical Characteristics unless otherwise specified

Characteristics	Symbol	Value		Unit
Forward Voltage Drop (Note2)	V_F	Typ.	Max.	V
at $I_F=3A$		0.49	-	
		0.43	-	
at $I_F=5A$		0.55	0.58	
		0.51	-	
at $I_F=10A$		0.67	0.70	
		0.62	-	
Maximum Reverse Current at $V_R=100V$	I_R	5	50	μA
		4	-	mA

Note2: Pulse test: 300 μs pulse width, 1 % duty cycle

RATINGS AND CHARACTERISTIC CURVES

FIG.1 MAXIMUM FORWARD CURRENT DERATING CURVE

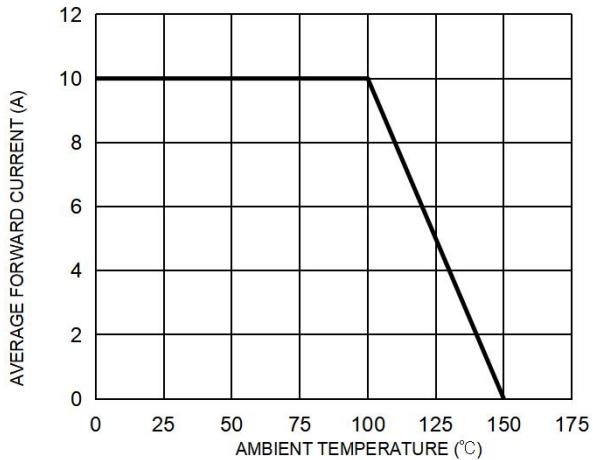


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

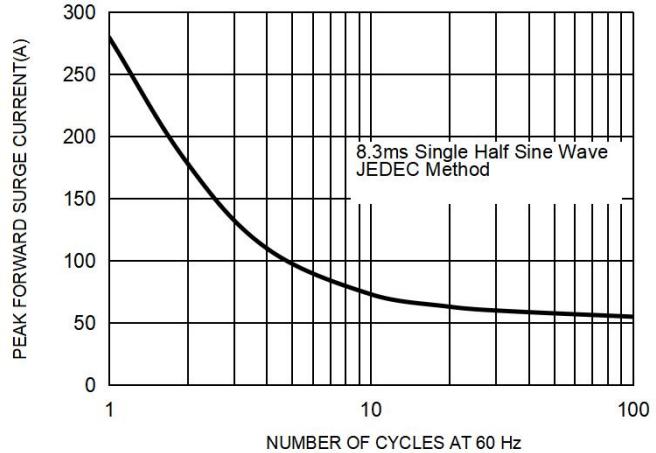


FIG. 3 TYPICAL FORWARD CHARACTERISTICS PER LEG



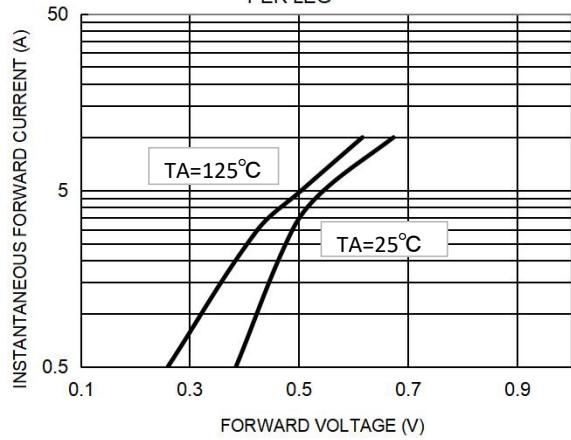


FIG. 4 TYPICAL REVERSE CHARACTERISTICS PER LEG

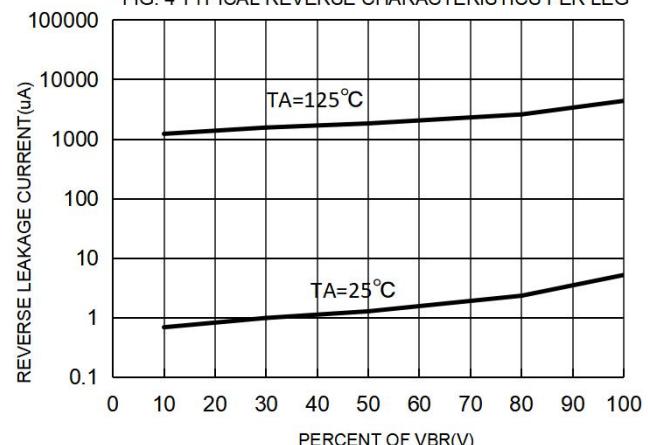

Package Outline Dimensions millimeters


TO-220AC

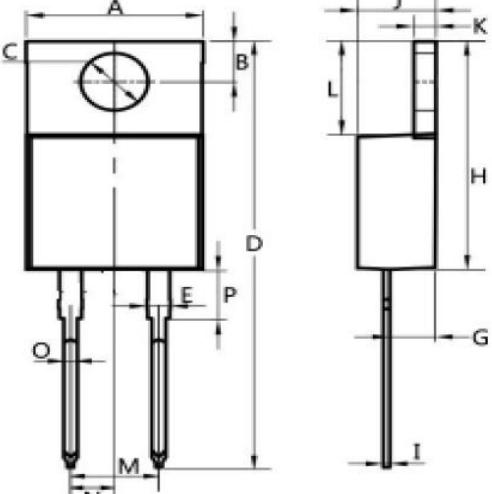

Dim.	Min.	Max.
A	10.15	10.35
B	2.65	2.95
C	3.70	3.90
D	28.5	29.5
E	1.3	1.45
G	2.9	3.3
H	15.0	16.0
I	0.38	0.42
J	4.45	4.55
K	1.25	1.35
L	6.35	6.55
M	Typ 5.08	
N	Typ 2.54	
O	0.76	0.84
P	3.1	3.3

All Dimensions in millimeter

TO-220FAC

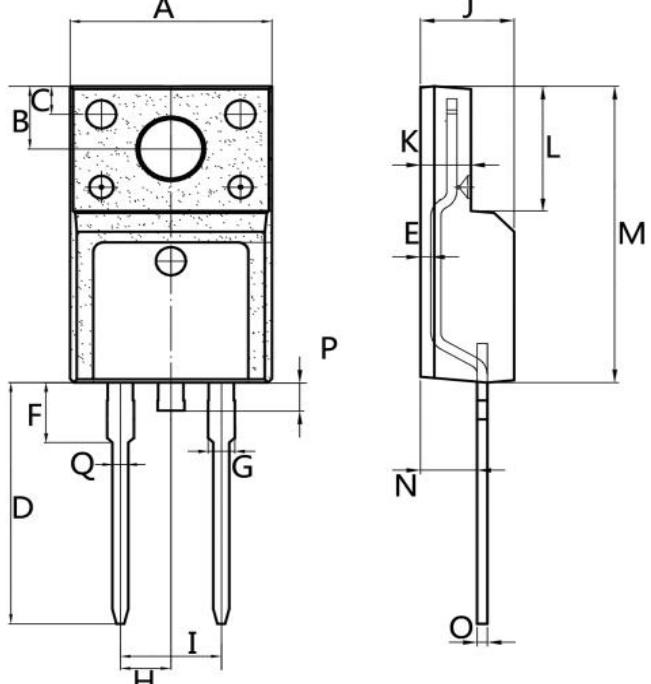


Dim.	Min.	Max.
A	9.95	10.35
B	2.95	3.25
C	1.25	1.45
D	12.95	13.25
E	0.40	0.60
F	2.8	3.5
G	1.30	1.45
H	Typ 2.54	
I	Typ 5.08	
J	4.60	4.75
K	2.45	2.65
L	6.5	6.8
M	15.4	16.0
N	2.75	3.05
O	0.45	0.55
P	0.6	0.8
Q	0.76	0.84

All Dimensions in millimeter

Package Outline Dimensions millimeters


TO-263

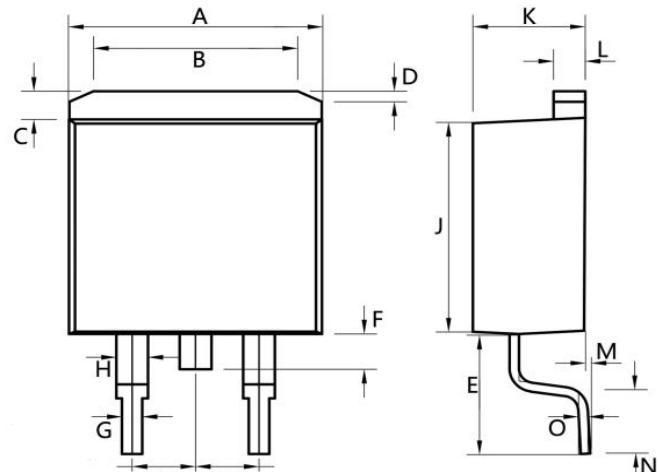

Dim.	Min.	Max.
A	10.10	10.35
B	6	8
C	1.2	1.5
D	0.55	1.0
E	4.3	5.3
F	1.4	1.6
G	0.75	0.85
H	1.2	1.5
I	Typ2.54	
J	8.5	9.5
K	4.3	4.55
L	1.25	1.35
M	0.02	0.23
N	2.2	2.8
O	0.3	0.4

All Dimensions in millimeter


TO-252

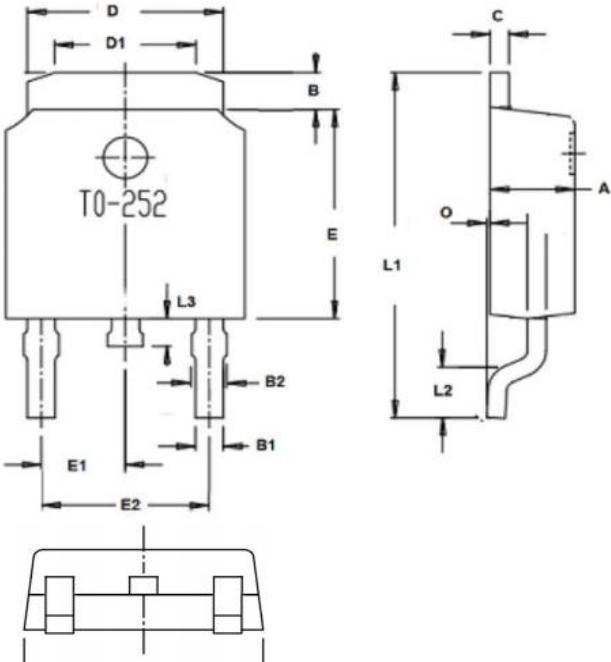

Dim.	Min.	Max.
A	2.1	2.5
A1	6.3	6.9
B	0.95	1.55
B1	0.6	0.8
B2	0.75	0.95
C	Typ0.5	
D	5.3	5.5
D1	3.65	4.05
E	5.8	6.4
E1	Typ2.3	
E2	Typ4.6	
O	0	0.15
L1	9	11
L2	Typ1.5	
L3	0.7	1.0

All Dimensions in millimeter

Marking on the body


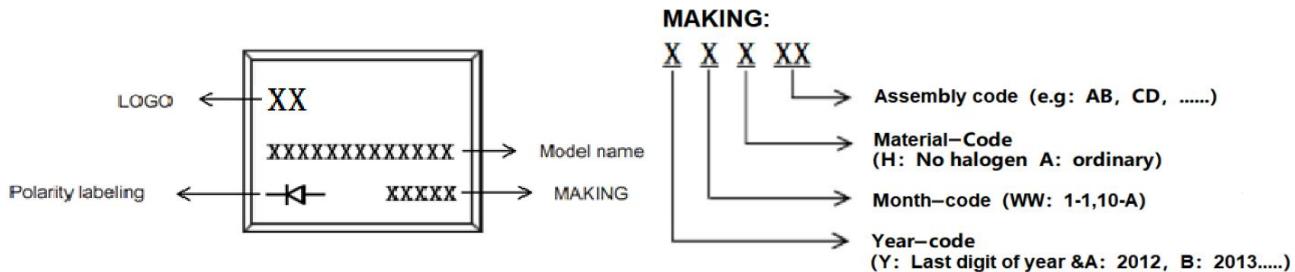


Ordering information

Part Number	Package	Base Quantity	Delivery mode
SBT10L100	TO-220AC	50 pcs / tube	1000pcs/box 5000pcs/carton
SBT10L100F	TO-220FAC	50 pcs / tube	1000pcs/box 5000pcs/carton
SBT10L100D	TO-263	50 pcs / tube	1000pcs/box 5000pcs/carton
SBT10L100D-R	TO-263	800 pcs / reel	1600pcs/box 8000pcs/carton
SBT10L100S	TO-252	2500 pcs / reel	5000pcs/box 25000pcs/carton

Note: For Halogen Free molding compound, add "H" suffix to part number above.

Packing instruction

PKG	最小包装	内盒	外箱
TO-220AC TO-220FAC TO-263			
	50pcs/管	1000pcs/盒	5000pcs/箱
TO-263-R			
	800pcs/盘	1600pcs/盒	8000pcs/箱
TO-252			
	2500pcs/盘	5000pcs/盒	25000pcs/箱

Notice

1. All product, product specifications and data are subject to change without notice to improve. The right to explain is owned by LINGXUN electronics company.
2. Confirm that operation temperature is within the specified range described in the product specification. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
3. LINGXUN electronics shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.